



5CCT DISK LIGHT WITH PIR SENSOR



DESCRIPTION

A flexible downlight solution supports surface mounting and retrofit installation .

With a PIR sensor.

High quality Iron shell with frosted PC diffuser.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Wet-location rated, ideal for garage, corridor hallways warehouse, in walk in closet, utility rooms and attics and many more.

4”

FEATURES

- Low profile, no flicker
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Provide true color rendering with 90+ CRI

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

INSTALLATION

Can be installed into any 3.5” inch junction box.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency

ENERGY SAVINGS

80% more energy savings than halogen lamps

LISTING

ETL Listed. Energy Star.FCC. Title24.

BASED ON SAMPLE SETTING.ACTUAL LUMENS MAY VARY.

<i>MODEL #</i>	<i>SIZE</i>	<i>WATTAGE</i>	<i>5CCT</i>	<i>LUMENS</i>
DS14-04-10-UC5- DI-WH	4inch	10W	2700K	700Lm
			3000K	750Lm
			3500K	780Lm
			4000K	830Lm
			5000K	800Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	110°
CONTROL METHOD	PIR Sensor
DELAY TURNING OFF THE LIGHT	1Min/5Min/8Min
MATERIAL	PC+Iron
LIFESPAN	≥50,000hours
COLOR	White
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimmable
RATING	Suitable for Wet Locations
WARRANTY	5 years Limited


Anticlockwise to open the outside lens



The delay auto turn off light has the option of 1 minute /5 minutes /8 minutes.




Beam Angle

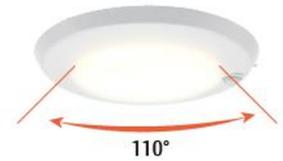


PIR SENSOR ON/OFF FUNCTION

During the day or evening, when the PIR sensor detects someone entering the sensing range, the light will turn on automatically; When the person leaves the sensing range, it Will automatically turn off the lights after a few minutes (you can mobilize the switch on the side of the light to select the delay time at 1min/5min/8min).


The detection range of PIR sensor around 16 feet;

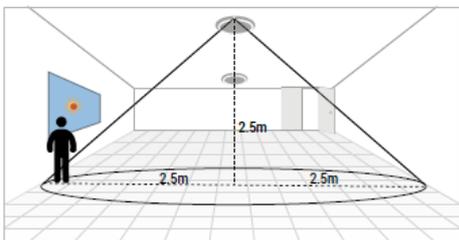

When the person is in the sensing area, the light will stay on until the person leaves;

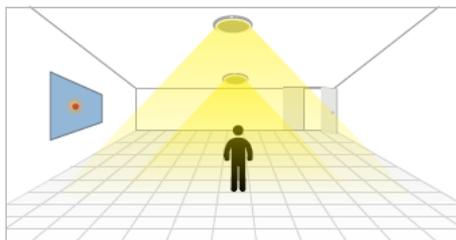

When the person leaves the sensing range, it will automatically turn off the lights after a few minutes.

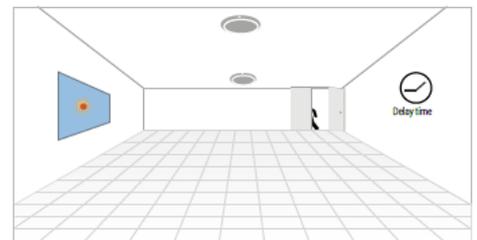

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	SLV-600P-AL			6672	IPL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MSCL-OP153M	6674	DSL06
TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	MACL-153M//MA-R	RNL06	

ACCESSORIES



SCREWS



WIRE

DIMENSION

